



A3000 Foldaway Counterweight Balanced Door



If you're ready to draw the line at average and reach for better call us today.

To locate Steel-Line branches across Australia call: **1300 427 243** or visit **steel-line.com.au**

The A3000 Foldaway Counterweight Balanced Door is custom made and designed for all applications where strength and superior appearance is required and openings designed to span as little as 1 metre to as much as 30 metres in width with minimal internal projection and requires little headroom. The main benefits of A3000's Foldaway Counterweight Balanced Door is that it achieves the lowest maintenance with the highest operation cycles.

A3000 is commonly used for Fire and Ambulance Stations, Aircraft Hangers, Showrooms and Transport Depots.

With Steel-Line custom made operating mechanism over 100,000 cycles are easily obtained per year, which is by far the lowest maintenance with the highest operational cycles of any conventional door system in Australia.

All Steel-Line counterweight doors are designed to withstand site specific wind loading in accordance to AS1170.2-2002. If wind loads are not provided, the standard industry 0.5 Kpa is used.

Features

- Minimal internal projection
- High traffic areas
- Custom built for all structural requirements and architectural designs
- Cladding versatility
- Minimal maintenance requirements



makers for over



Recommended Specification

A3000 is custom built for each specific application. Please contact Steel-Line for any technical assistance in design and installation. Listed below are some of the main design considerations when specifying the A3000:

- Operational Requirements.
- Opening Dimensions.
- Structural Requirements.
- Architectural Requirements.

Therefore it is important to accurately measure the opening dimensions and adequately specify any requirements.

Opening Requirements

The A3000 Foldaway Counterweight Balanced Door requires operational clearances as well as permanent space for its accommodation. These dimensions vary depending on the application. It is important to take these in to consideration especially the operational clearances as they impinge on other design criteria, for example the drive through clearances.

Motorisation

Motorisation requires the addition of:

- Motorisation Guides.
- Drive Unit, Including Torque Limiter.
- Independent Limit Switches.
- Overhead Shaft.
- Control System.

When a motorised door is ordered the above mentioned items are included as they are all integral components of the door. Motorisation may be fitted to an existing manual door however this may require extensive modification.

Locking

Locking is normally provided on manual operated doors only. Pad bolts are fitted internally to allow the door to be latched in the closed position. These can be fitted with padlocks if required.


Locking for motorised doors is usually locked via the motor however additional locking is available, for example electric or magnetic locks.

Cladding / Glazing


Being a counterweight balanced door the A3000 Foldaway Counterweight Balanced Door can be designed to accept a wide variety of cladding and glazing materials.

The following combinations of glazing and cladding are quite common:

- Sheetting products such as Trimdek and Custom Orb.
- Toughened Laminated Glass.
- Polycarbonate, Acrylic, Perspex and Laserlite etc.
- Aluminium Composite Panels (ACP).

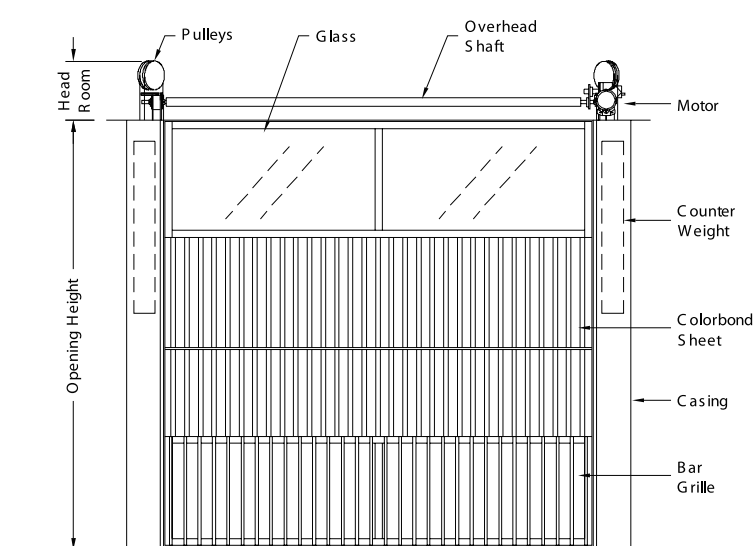


ELEVATION (View Inside Looking Out)

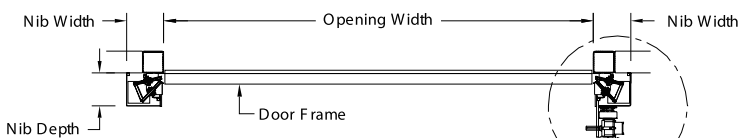


PLAN VIEW

DET.01

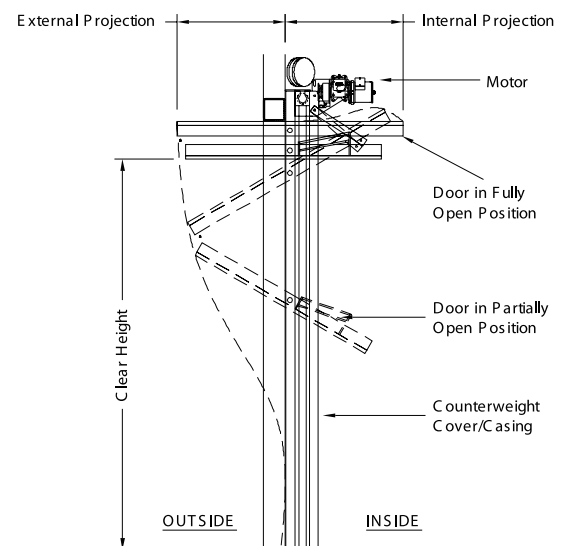

SECTION VIEW

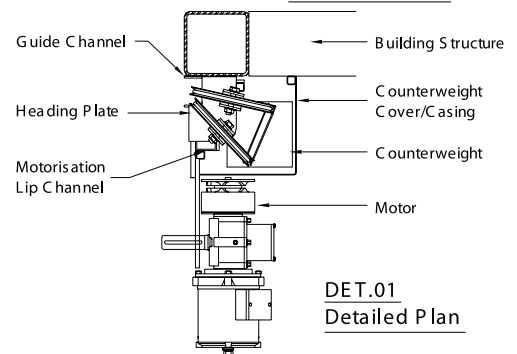

DET.01
Detailed Plan

Steel-Line reserves the right to change specifications at any time without notice.